

Solder Paste Water-Washable Sn42/Bi57.6/Ag0.4

Product Highlights

Printing speeds up to 100mm/sec
Long stencil life, Wide process window
Clear residue

Low voiding
Excellent wetting compatibility on most board finishes
RoHS 3 and REACH compliant

Specifications

Alloy: Sn42/Bi57.6/Ag0.4
Flux Type: Water-Washable
Flux Classification: REM0
Melting Point: 137°C (279°F)
Shelf Life: Refrigerated >12 months, Room Temperature >1 month

Orderable Part Numbers	Mesh Size (Micron Range)	Metal Load	Application	Packaging
HMT43LT-T3-35S	T3 (25-45 µm)	87%	Dispense	35g syringe
HMT43LT-T3-100S				100g syringe
HMT43LT-T3-500J		89.75%	Print	500g jar
HMT43LT-T3-600C				600g cartridge
HMT43LT-T4-35S	T4 (20-38 µm)	87%	Dispense	35g syringe
HMT43LT-T4-100S				100g syringe
HMT43LT-T4-500J		89.75%	Print	500g jar
HMT43LT-T4-600C				600g cartridge
HMT43LT-T5-35S	T5 (15-25 µm)	87%	Dispense	35g syringe
HMT43LT-T5-100S				100g syringe
HMT43LT-T5-500J		89.5%	Print	500g jar
HMT43LT-T5-600J				600g cartridge

Printer Operation

Print Speed: 25-100mm/sec
Squeegee Pressure: 70-250g/cm of blade
Under Stencil Wipe: Once every 10-25 prints, or as necessary

Stencil Life

>16 hours @ 20-50% RH 22-28°C (72-82°F)
>8 hours @ 50-70% RH 22-28°C (72-82°F)

Cleaning

HMT43LT can be cleaned using deionized water at 40-60°C with a recommended water pressure of 30-50 PSI. Under normal conditions, there is no need for detergents or saponifiers. For high density or low standoff assemblies, a detergent cleaner is recommended to reduce surface tension of the washing system.

Storage and Handling


Refrigerate at 3-8°C (37-46°F). Do not freeze. Allow 4 hours for solder paste to reach an operating temperature of 20-25°C (68-77°F) before use.

Transportation

This product has no shipping restrictions. Shipping below 0°C (32°F) or above 25°C (77°F) for normal transit times by ground or air will not impact this product's stated shelf life.

Recommended Profile

Reflow profile for Sn42/Bi57.6/Ag0.4 or Sn42/Bi58 solder assembly, designed as a starting point for process optimization.

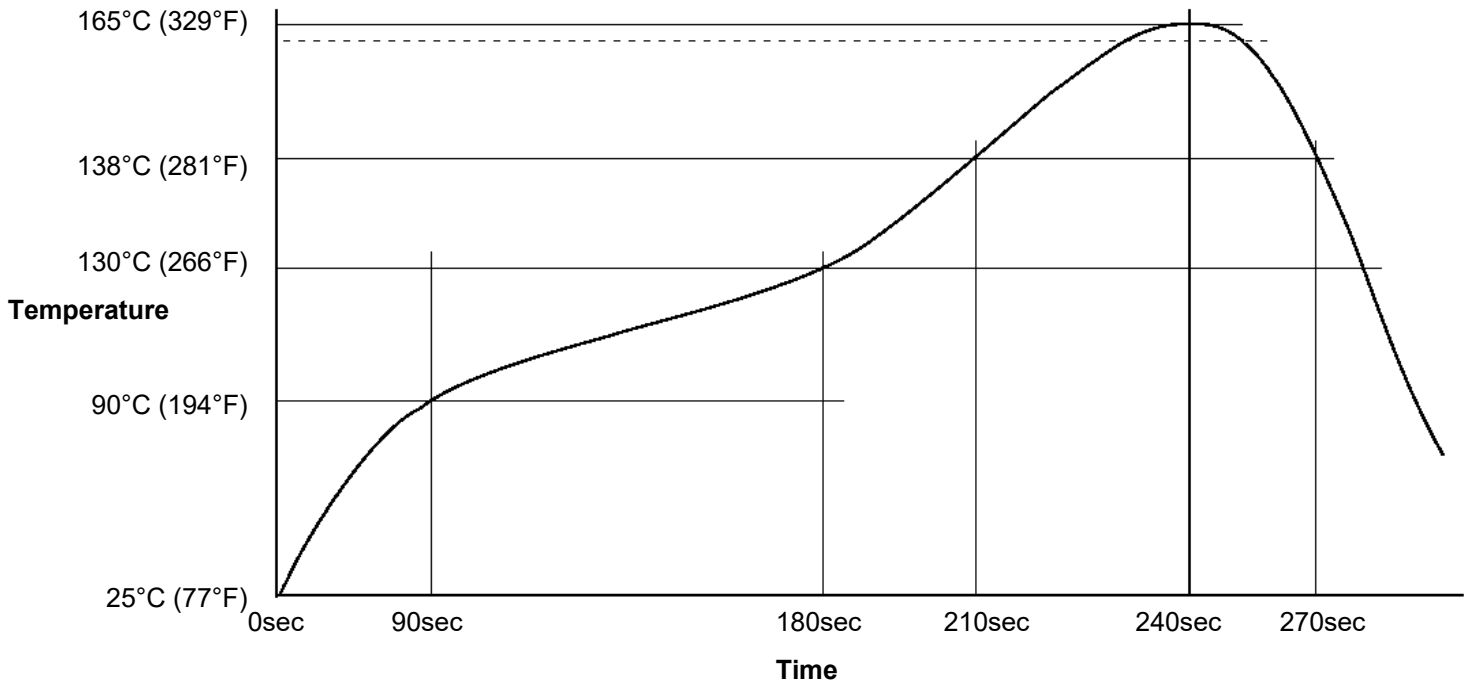

Test Results

Test J-STD-004 or other requirements as stated	Test Requirement	Result
Copper Mirror	IPC-TM-650: 2.3.32	M: <50% Breakthrough (uncleaned)
Corrosion	IPC-TM-650: 2.6.15	M: Minor Corrosion (uncleaned)
Quantitative Halides	IPC-TM-650: 2.3.28.1	M: ≥0.05 and < 0.5%
Electrochemical Migration	IPC-TM-650: 2.6.14.1	L: <1 decade drop (cleaned)
Surface Insulation Resistance 40°C, 90% RH @ 168 Hours	IPC-TM-650: 2.6.3.7	L: ≥100MΩ (cleaned)
Tack Value	IPC-TM-650: 2.4.44	38-42g
Viscosity – Malcom @ 10 RPM/25°C (x10 ³ mPa·s)	IPC-TM-650: 2.4.34.4	Print: 160-220, Dispense:75-105
Visual	IPC-TM-650: 3.4.2.5	Clear and free from precipitation
Conflict Minerals Compliance	Electronic Industry Citizenship Coalition (EICC)	Compliant
REACH Compliance	Articles 33 and 67 of Regulation (EC) No 1907/2006	Contains no substance >0.1% w/w that is listed as a SVHC or restricted for use in solder materials

Conforms to the following Industry Standards:

J-STD-004B, Amendment 1 (Solder Fluxes):	Yes
J-STD-005A (Solder Pastes):	Yes
J-STD-006C, Amendments 1 & 2 (Solder Alloys and Fluxed/Non-Fluxed Solders):	Yes
RoHS 3 Directive (EU) 2015/863:	Yes